

[CORSAIR] *shift*

DIFFUSED LED BATTEN



Description

The [CORSAIR] LED batten features a quick-fit design for simple installation. Built with a robust metal body, the [CORSAIR] comes standard as tri-colour and wattage selectable. This versatile fitting is also available in sensor and emergency versions.

Innovative Design

Engineered with a modular LED board and diffuser allowing the drive tray to drop for fast and toolless re-assembly.



Key Features


- Unique quick-fit diffuser and gear tray for easy installation
- Wattage switchable & tri-colour for versatility
- Side or rear cable entry standard
- Emergency and sensor options available
- Large terminal block



Technical Specifications

Rated Life	≥30,000 hours	Operating Temperature	-20°C to +45°C
Body	Steel + Polycarbonate	Input Voltage	185-265 VAC ~ 50/60Hz
Installation	Surface mounted, Suspension	IP Rating	IP20
Beam Angle	120°	Connection	Terminal block
Power Factor	>0.9	Net Weight	1.1kg (600mm) 1.9kg (1200mm)
CRI	>80		

Dimensional Drawing

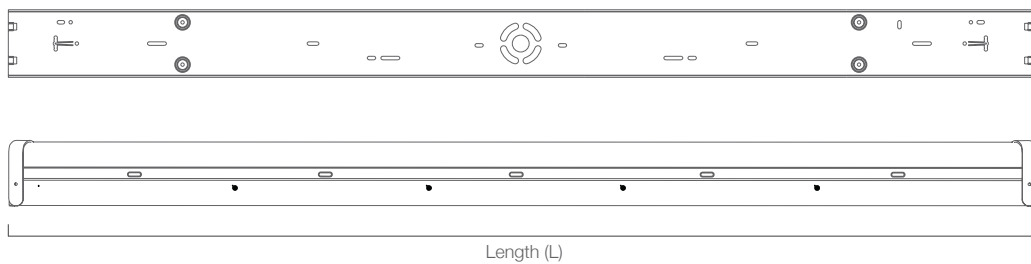

Wattage	L	H	W
20W	600	79.5	84.5
36W	1200	79.5	84.5

Unit = mm

Product Data

Part Number	Power	Lumen Output	CCT (Selectable)
BC-2-20S120* <i>(shift:)</i>	20W/10W	2000-2200lm	Colour Selectable (3000K/4000K/5700K)
BC-4-36S120* <i>(shift:)</i>	36W/18W	3600-3960lm	Colour Selectable (3000K/4000K/5700K)

* Sensor Dimmable option available, add '-SD' to model code.

Emergency option available, add '-E' to model code.

eg. BS-4-30S120-ESD