

[HALO]

LED DOWNLIGHT



Description

The [HALO] is a market-leading and highly versatile LED downlight. It is capable of 30 degrees of angle adjustment as well as featuring an advanced front lens designed to reduce glare and ensure optimal illumination. The IP65 body allows for installation in both interior and exterior applications.

Key Features

- Recessed lens system for a premium look and feel
- Dimmable through phase-cut (TRIAC)
- 100% aluminium body
- 30 degrees of tilt adjustment
- IP65 luminaire

Tiltable


Flexible applications with 30° tilt angle adjustment.



Technical Specifications

Rated Life	≥40,000 hours	Operating Temperature	-10°C to +45°C
Body	Aluminium	Input Voltage	200-240V ~ 50/60Hz
Installation	Built-in clips	IP Rating	IP65 Luminaire (IP40 Driver)
Beam Angle	60°	Connection	Flex and plug (1m)
Power Factor	>0.90	Net Weight	0.195kg (5W) 0.4kg (8W)
CRI	>80		

Dimensional Drawing

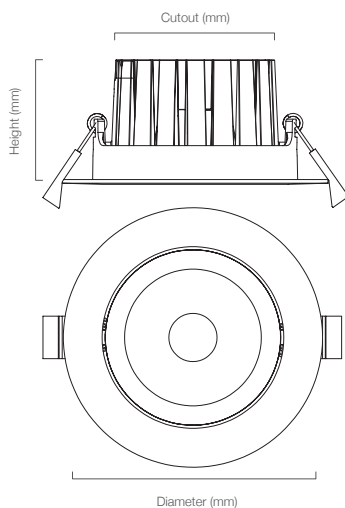

Wattage	Dia.	H	C
5W	Ø80	30	70±5
8W	Ø110	49.5	90±5

Unit = mm

Product Data

Part Number	Power	Lumen Output	CCT	Dimensions
DH-25-5W60	5W	475lm	3000K	Ø80 X 30
DH-25-5C60	5W	525lm	4000K	Ø80 X 30
DH-25-5D60	5W	520lm	5700K	Ø80 X 30
DH-35-8W60	8W	720lm	3000K	Ø110 X 49.5
DH-35-8C60	8W	805lm	4000K	Ø110 X 49.5
DH-35-8D60	8W	780lm	5700K	Ø110 X 49.5