

# [PISO]

## LED PANEL



### Description

The ultra-thin [PISO] is a lightweight and efficient LED panel light capable of delivering 110lm/W. With either a surface mounting kit, or plaster kit the [PISO] is easy to install and comes in a variety of sizes. Dimmable version is available by special order.


### Key Features

- Highly efficient design achieving over 110lm/W
- Utilising tier 1 components for a long service life in excess of 50,000 hours
- Flex and plug for easy installation
- Powder coated aluminium frame to eliminate light spill
- High quality diffuser to achieve a low UGR (Unified Glare Rating)
- Dimmable version available by special order



10mm

## ACCESSORIES

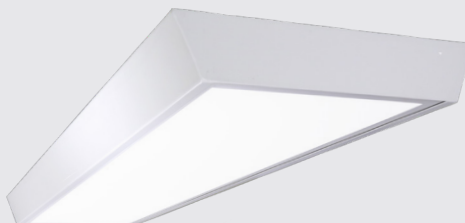

### Surface Mounted Kit

Model No.	SF-12x3-W	SF-6x3-W
Size	1200 x 356 x 68mm	600 x 356 x 68mm
Materials	Steel	
Finish	Powder Coated	
Colour	White	




### Plaster Kit

Model No.	PF-12x3-W	PF-6x3-W
Size	1200 x 356 x 26mm	600 x 330 x 26mm
Materials	Aluminium	
Finish	Powder Coated	
Colour	White	

## Technical Specifications

Rated Life	≥50,000 hours	Operating Temperature	-10°C to +40°C
Body	Aluminium	Input Voltage	220 – 240 VAC ~ 50/60Hz
Installation	Suspension, T bar, Surface mount	IP Rating	IP20
Beam Angle	120°	Connection	Flex and plug (1.2m)
Power Factor	>0.95	Net Weight	1.5kg (6x3) / 2.8kg (6x6) 2.8kg (12x3) / 6.0kg (12x6)
CRI	>83		

## Dimensional Drawing

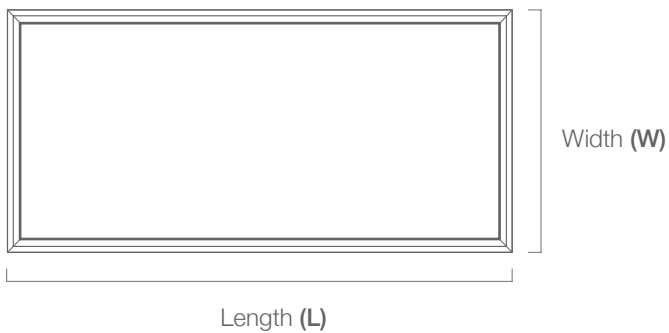

Height (H)

Model	L	W	H
600 x 300	595	295	10
600 x 600	595	595	10
1200 x 300	1195	295	10
1200 x 600	1195	595	10

Unit = mm

## Product Data

Part Number	Power	Lumen Output	CCT
PP-6X3-20W120*	20W	2000lm	3000K
PP-6X3-20C120	20W	2200lm	4000K
PP-6X3-20D120	20W	2200lm	5700K
PP-6X6-36W120*	36W	3600lm	3000K
PP-6X6-36C120	36W	3960lm	4000K
PP-6X6-36D120	36W	3960lm	5700K
PP-12X3-36W120*	36W	3600lm	3000K
PP-12X3-36C120	36W	4000lm	4000K
PP-12X3-36D120	36W	3980lm	5700K
PP-12X6-36W120*	36W	3600lm	3000K
PP-12X6-36C120	36W	3960lm	4000K
PP-12X6-36D120	36W	3960lm	5700K

\*Special order item