

[SKYLINE] *shift*

DIFFUSED LED BATTEN



Description

The [SKYLINE] LED batten features a quick-fit design for simple installation. Crafted to be a versatile long-life fitting with numerous mounting options. Built with premium components the [SKYLINE] is also available with selectable colours, motion detection and emergency options.



shift
COLOUR SELECTABLE

Key Features

- Unique quick-fit diffuser and gear tray for easy installation
- Premium aluminium gear tray and body for improved heat dissipation
- Side or rear cable entry standard
- Tri-colour for versatile use
- Emergency and sensor options available

Innovative Design


Engineered with a modular LED board and diffuser allowing the drive tray to drop for fast and toolless re-assembly.



Technical Specifications

Rated Life	≥50,000 hours	Operating Temperature	-20°C to +45°C
Body	Steel + Polycarbonate	Input Voltage	220-240 VAC ~ 50/60Hz
Installation	Surface mounted	IP Rating	IP20
Beam Angle	120°	Connection	Terminal block
Power Factor	>0.90	Net Weight	1.1kg (600mm) 1.9kg (1200mm)
CRI	>83		

Dimensional Drawing

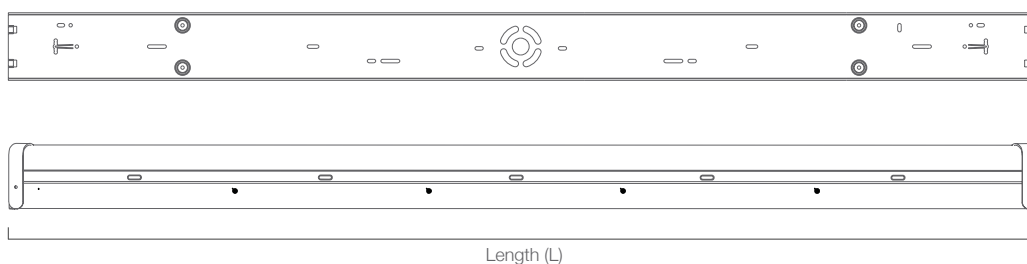

Wattage	L	H	W
16W	600	79.5	84.5
30W	1200	79.5	84.5

Unit = mm

Product Data

Part Number	Power	Lumen Output	CCT (Selectable)
BS-2-16S120 (shift:)	16W	1800-2080lm	Colour Selectable (3000K/4000K/5700K)
BS-4-30S120 (shift:)	30W	3600-4180lm	Colour Selectable (3000K/4000K/5700K)

Sensor option available, add '-S' to model code.

Emergency option available, add '-E' to model code.

Dimmable option available, add '-D' to model code.

eg. BS-4-30S120-ESD