


# LIGHTING

## LED BATTENS & TUBES

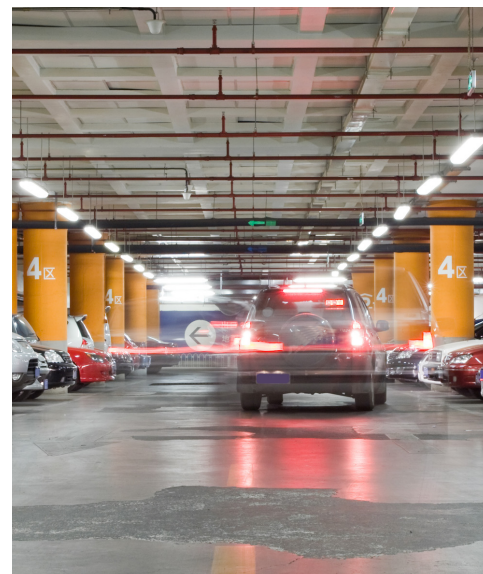

### UNI BATTENS

#### IP20 BATTEN SERIES

The Uni IP20 Batten Series is built around a philosophy of delivering ease of installation with high efficiency.

The **Tri-Colour Batten** features switch controlled colour temperature, giving you the flexibility to match existing lighting colours and provide your customers with additional options.

The **Sensor Batten** includes a built-in motion sensor with customisable dimming levels and hold times. The energy savings that the dimmable sensor delivers, makes this batten the perfect fit for environments with variable occupancy.

### FEATURES

- Traditional batten profile
- Surface mountable or suspendable
- Flicker free driver
- No external junction box required
- Broad 120° beam angle
- Available with built-in sensor and tri-colour models
- IK08 rating

### SPECIFICATIONS

LPM = LCP LOW POWER MODE

POWER FACTOR	>0.9	MODEL NUMBER	CCT	DIMENSIONS	WATT	LCP	LPM	LUMENS	EFFICACY
CRI	>80	EP-UNI-620-10	5000K	600mm	10	9.78		1394	142lm/W
BEAM ANGLE	120°	EP-UNI-1220-25	5000K	1200mm	25	24.88		3617	145lm/W
IP RATING	20	<b>TRI-COLOUR</b>							
LIFETIME (L70)	>60,000hrs	EP-UNI-T620-18	4/5/6000K	600mm	18	17.82		2467	138lm/W
WARRANTY	5 Years	EP-UNI-TS1220-15	4/5/6000K	1200mm	15	15	1.5	2000	133lm/W
<b>SENSOR SETTINGS</b>		EP-UNI-T1220-25	4/5/6000K	1200mm	25	24.13		3696	153lm/W
DETECTION RANGE	5 or 10 metres	EP-UNI-T1220-35	4/5/6000K	1200mm	35	34.23		3935	144lm/W
HOLD TIME	1m, 5m, 15mins or infinite	EP-UNI-T1220-45	4/5/6000K	1200mm	45	45		5400	120lm/W
DAYLIGHT SENSOR	50Lux or disabled	<b>TRI-COLOUR WITH SENSOR</b>							
STANDBY PERIOD	0s, 5m, 30m or infinite	EP-UNI-TS620-18	4/5/6000K	600mm	18	17.25	1.7	2419	140lm/W
STANDBY LEVEL	10, 20, 30 or 50%	EP-UNI-TS1220-25	4/5/6000K	1200mm	25	24.46	2.4	3593	147lm/W
<b>Highlighted values = sensor default settings</b>		EP-UNI-TS1220-35	4/5/6000K	1200mm	35	34.19	3.4	4466	131lm/W
		EP-UNI-TS1220-45	4/5/6000K	1200mm	45	45	4.5	5400	120lm/W
		EP-UNI-TS1520-45	4/5/6000K	1500mm	45	45	4.5	5400	120lm/W

