


LIGHTING

LED BATTENS & TUBES

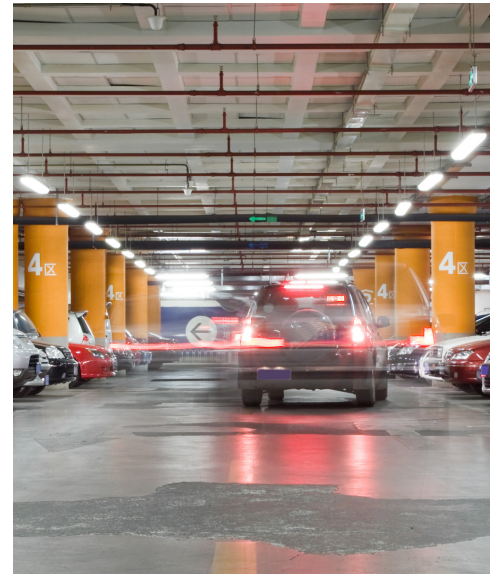

UNI BATTEN SERIES

IP20 BATTENS

The Uni IP20 Batten Series is built around a philosophy of delivering ease of installation with high efficiency.

The **Tri-Colour Batten** features switch controlled colour temperatures, giving you the flexibility to match existing lighting colours and provide your customers with additional options.

The **Sensor Batten** includes a built-in motion sensor with customisable dimming levels and hold times. The energy savings that the dimmable sensor delivers, makes this batten the perfect fit for environments with variable occupancy.

FEATURES

- Traditional batten profile
- Surface mountable or suspendable
- Flicker free driver
- No external junction box required
- Broad 120° beam angle
- Available with built-in sensor and tri-colour models
- IK08 rating

SPECIFICATIONS

POWER FACTOR	>0.9
CRI	>80
BEAM ANGLE	120°
IP RATING	20
LIFETIME (L ₇₀)	>60,000hrs
WARRANTY	5 Years

SENSOR SETTINGS

DETECTION RANGE	5 or 10 metres
HOLD TIME	1m, 5m , 15mins or infinite
DAYLIGHT SENSOR	50Lux or disabled
STANDBY PERIOD	0s, 5m , 30m or infinite
STANDBY LEVEL	10 , 20, 30 or 50%

Highlighted values = sensor default settings

LPM = LCP LOW POWER MODE

MODEL NUMBER	CCT	DIMENSIONS	WATT	LCP	LPM	LUMENS	EFFICACY
EP-UNI-620-10	5000K	600mm	10	9.78		1394	142lm/W
EP-UNI-1220-15	5000K	1200mm	15	14.63		2500	171lm/W
EP-UNIG2-1220-25	5000K	1200mm	25	23.37		3252	139lm/W
TRI-COLOUR							
EP-UNI-T620-18	4/5/6000K	600mm	18	17.82		2467	138lm/W
EP-UNI-T1220-25	4/5/6000K	1200mm	25	24.13		3696	153lm/W
EP-UNI-T1220-35	4/5/6000K	1200mm	35	34.23		3935	144lm/W
TRI-COLOUR WITH SENSOR							
EP-UNI-TS620-18	4/5/6000K	600mm	18	17.25	1.7	2419	140lm/W
EP-UNI-TS1220-15	4/5/6000K	1200mm	15	15	1.5	2000	133lm/W
EP-UNI-TS1220-25	4/5/6000K	1200mm	25	24.46	2.4	3593	147lm/W
EP-UNI-TS1220-35	4/5/6000K	1200mm	35	34.19	3.4	4466	131lm/W
EP-UNI-TS1520-45	4/5/6000K	1500mm	45	45	4.5	5400	120lm/W